

Travertine D006

Grain Direction

Travertine can be supplied with two different grain directions: 'Parallel Grain' and 'Perpendicular Grain'.


Parallel Grain - the brushstrokes are in line with the grain of the panel; with this technique the panel seams almost completely disappear.

Perpendicular Grain - the brushstrokes run across the width of the panel, perpendicular to the grain; with this technique the strong panelling becomes a feature of the design.

Parallel Grain



Perpendicular Grain

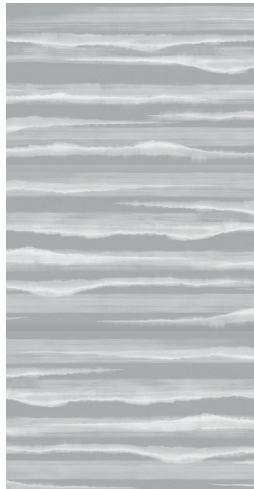

← 915mm/36" →

← 915mm/36" →

Design and Installation

Panels can be painted either 'Parallel' or 'Perpendicular' as detailed above, these can then be installed horizontally or vertically creating 4 distinctive effects.

The most popular installation is Parallel Grain, hung horizontally, as illustrated in the example on the right. It is important to note that with this installation the design will not match at end-to-end panel joins. To minimise this, panel joins are placed in wall corners where possible.

We can provide a panel plan without a design layout to show where panel joins will be placed; this will carry a 10% tailoring fee. We recommend this tailored option for optimum results.

Measuring Process and Quantity


Quantity will be calculated from the total square meterage/yardage including our standard panel tolerance.

For a panel plan to be created either elevations/floor plan should be provided or accurate dimensions need to be specified.


Panel Length/Height - Standard panel length up to 3600mm/141". Panels over the standard length are available but may carry a surcharge.

Panel Width - Standard panel width 915mm/36" plus 15mm/1/2" trim.


Parallel Grain, hung horizontally

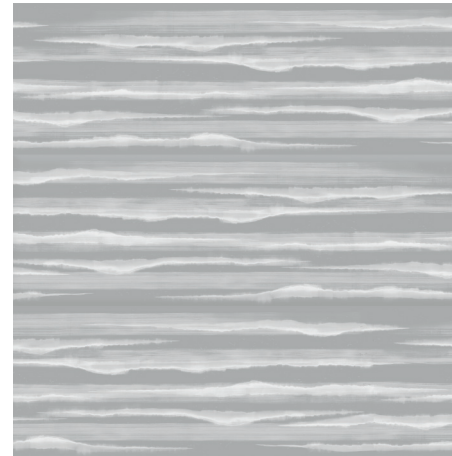

Perpendicular Grain, hung vertically

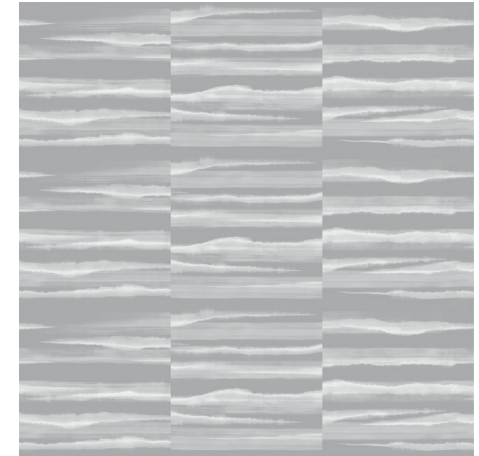

Example Corner Join (Parallel Grain, hung horizontally)

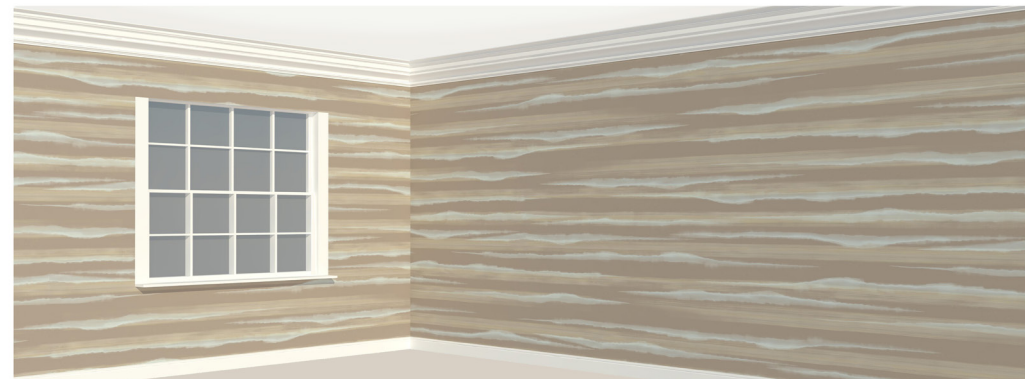

Example Panel Plan

